


EXAMPLE OF BONDING FOR METAL FRAMED ABOVE GROUND POOL

#8 bare copper 18"-24" from pool perimeter and connected to pool frame in at least 4 uniformly spaced locations. Buried 4"-6" below subgrade.

All metal surfaces (ladders, fences, metal decks, etc.) within 5 feet of the pool shall be bonded to this system.

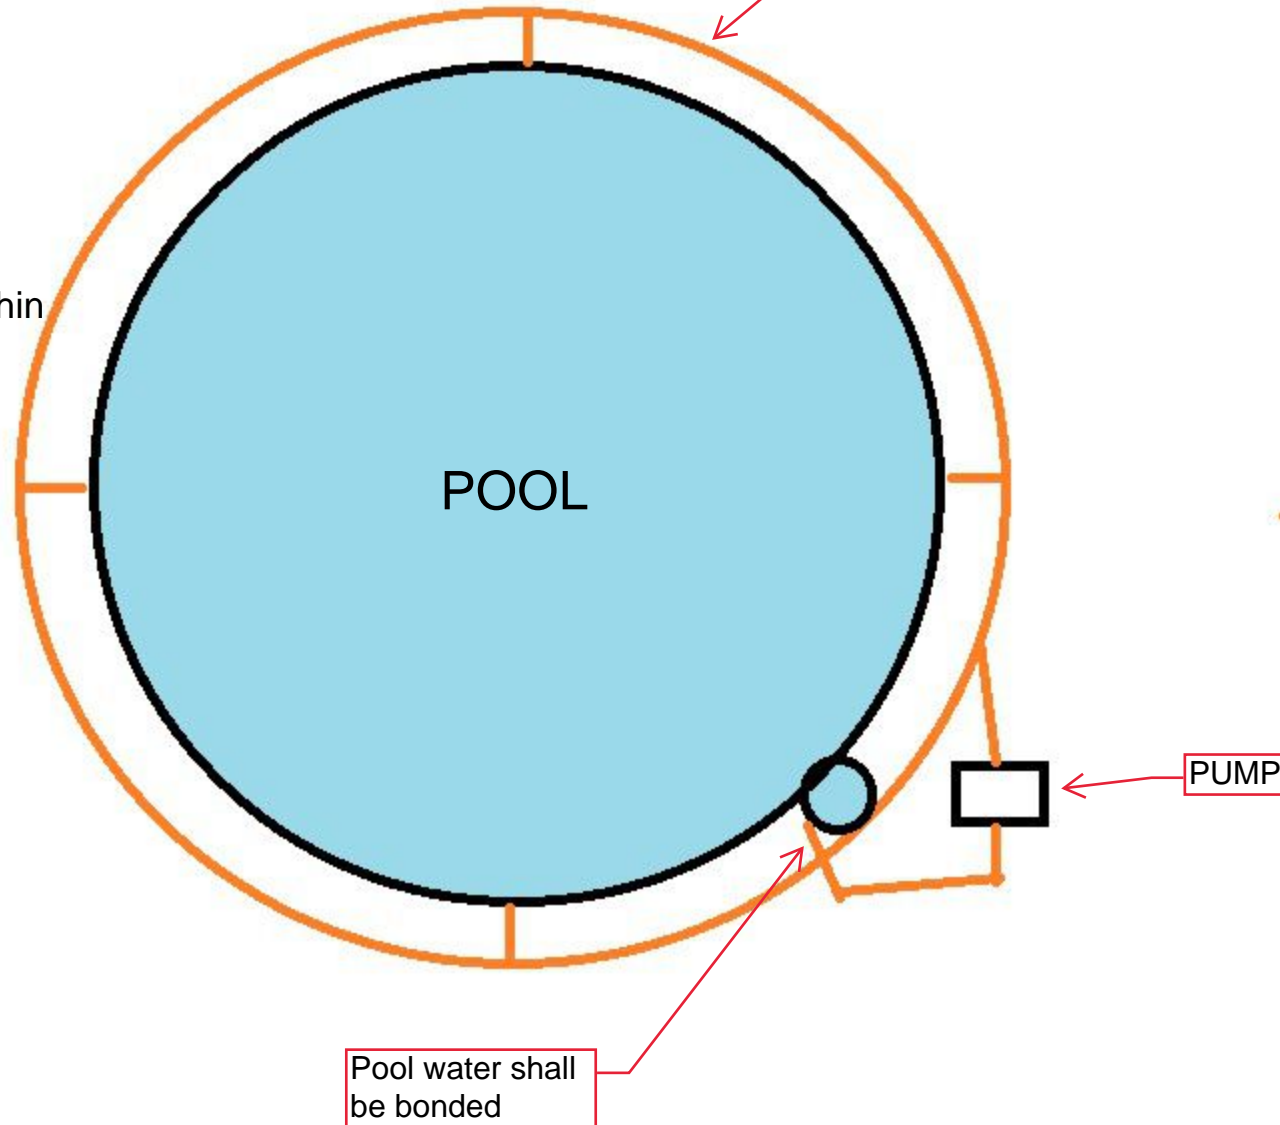

Pool water shall be bonded